






PADDED PARKER 100% Recycled Polyester

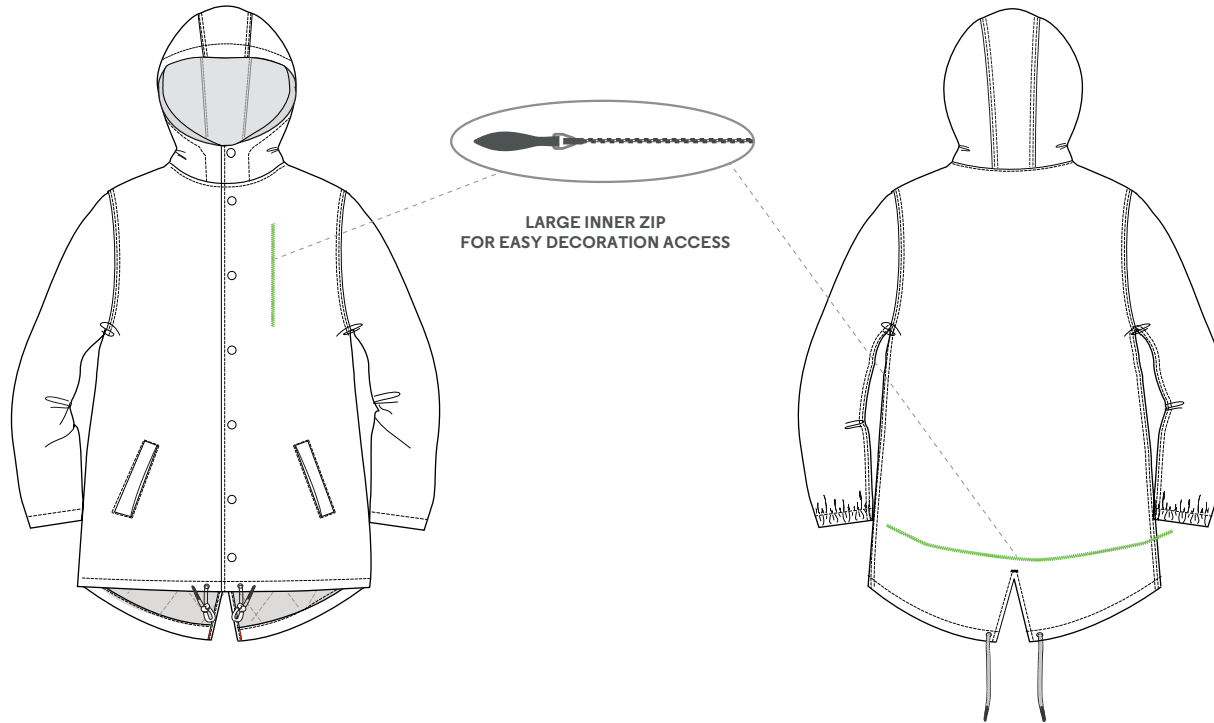

SCREEN PRINT		NEED SPECIAL INKS AND ADDITIVES FOR LOW CURING TEMPERATURE
TRANSFER DTF, FLOCK, SCREEN		MAX 130°C / 2-3 BARS / BAKING PAPER ANTI-MIGRATION LAYER RECOMMENDED USE TYPE OF GLUE ADEQUATE FOR PRESS T° STEAM AFTER PRESS TO LIMIT SHINY MARKS
D.T.G.		INSTEAD USE TRANSFER (FOLLOW TRANSFER RECOMMENDATIONS)
EMBROIDERY		DIRECT EMBROIDERY, STITCHED PATCH, LOOP LABELS...